



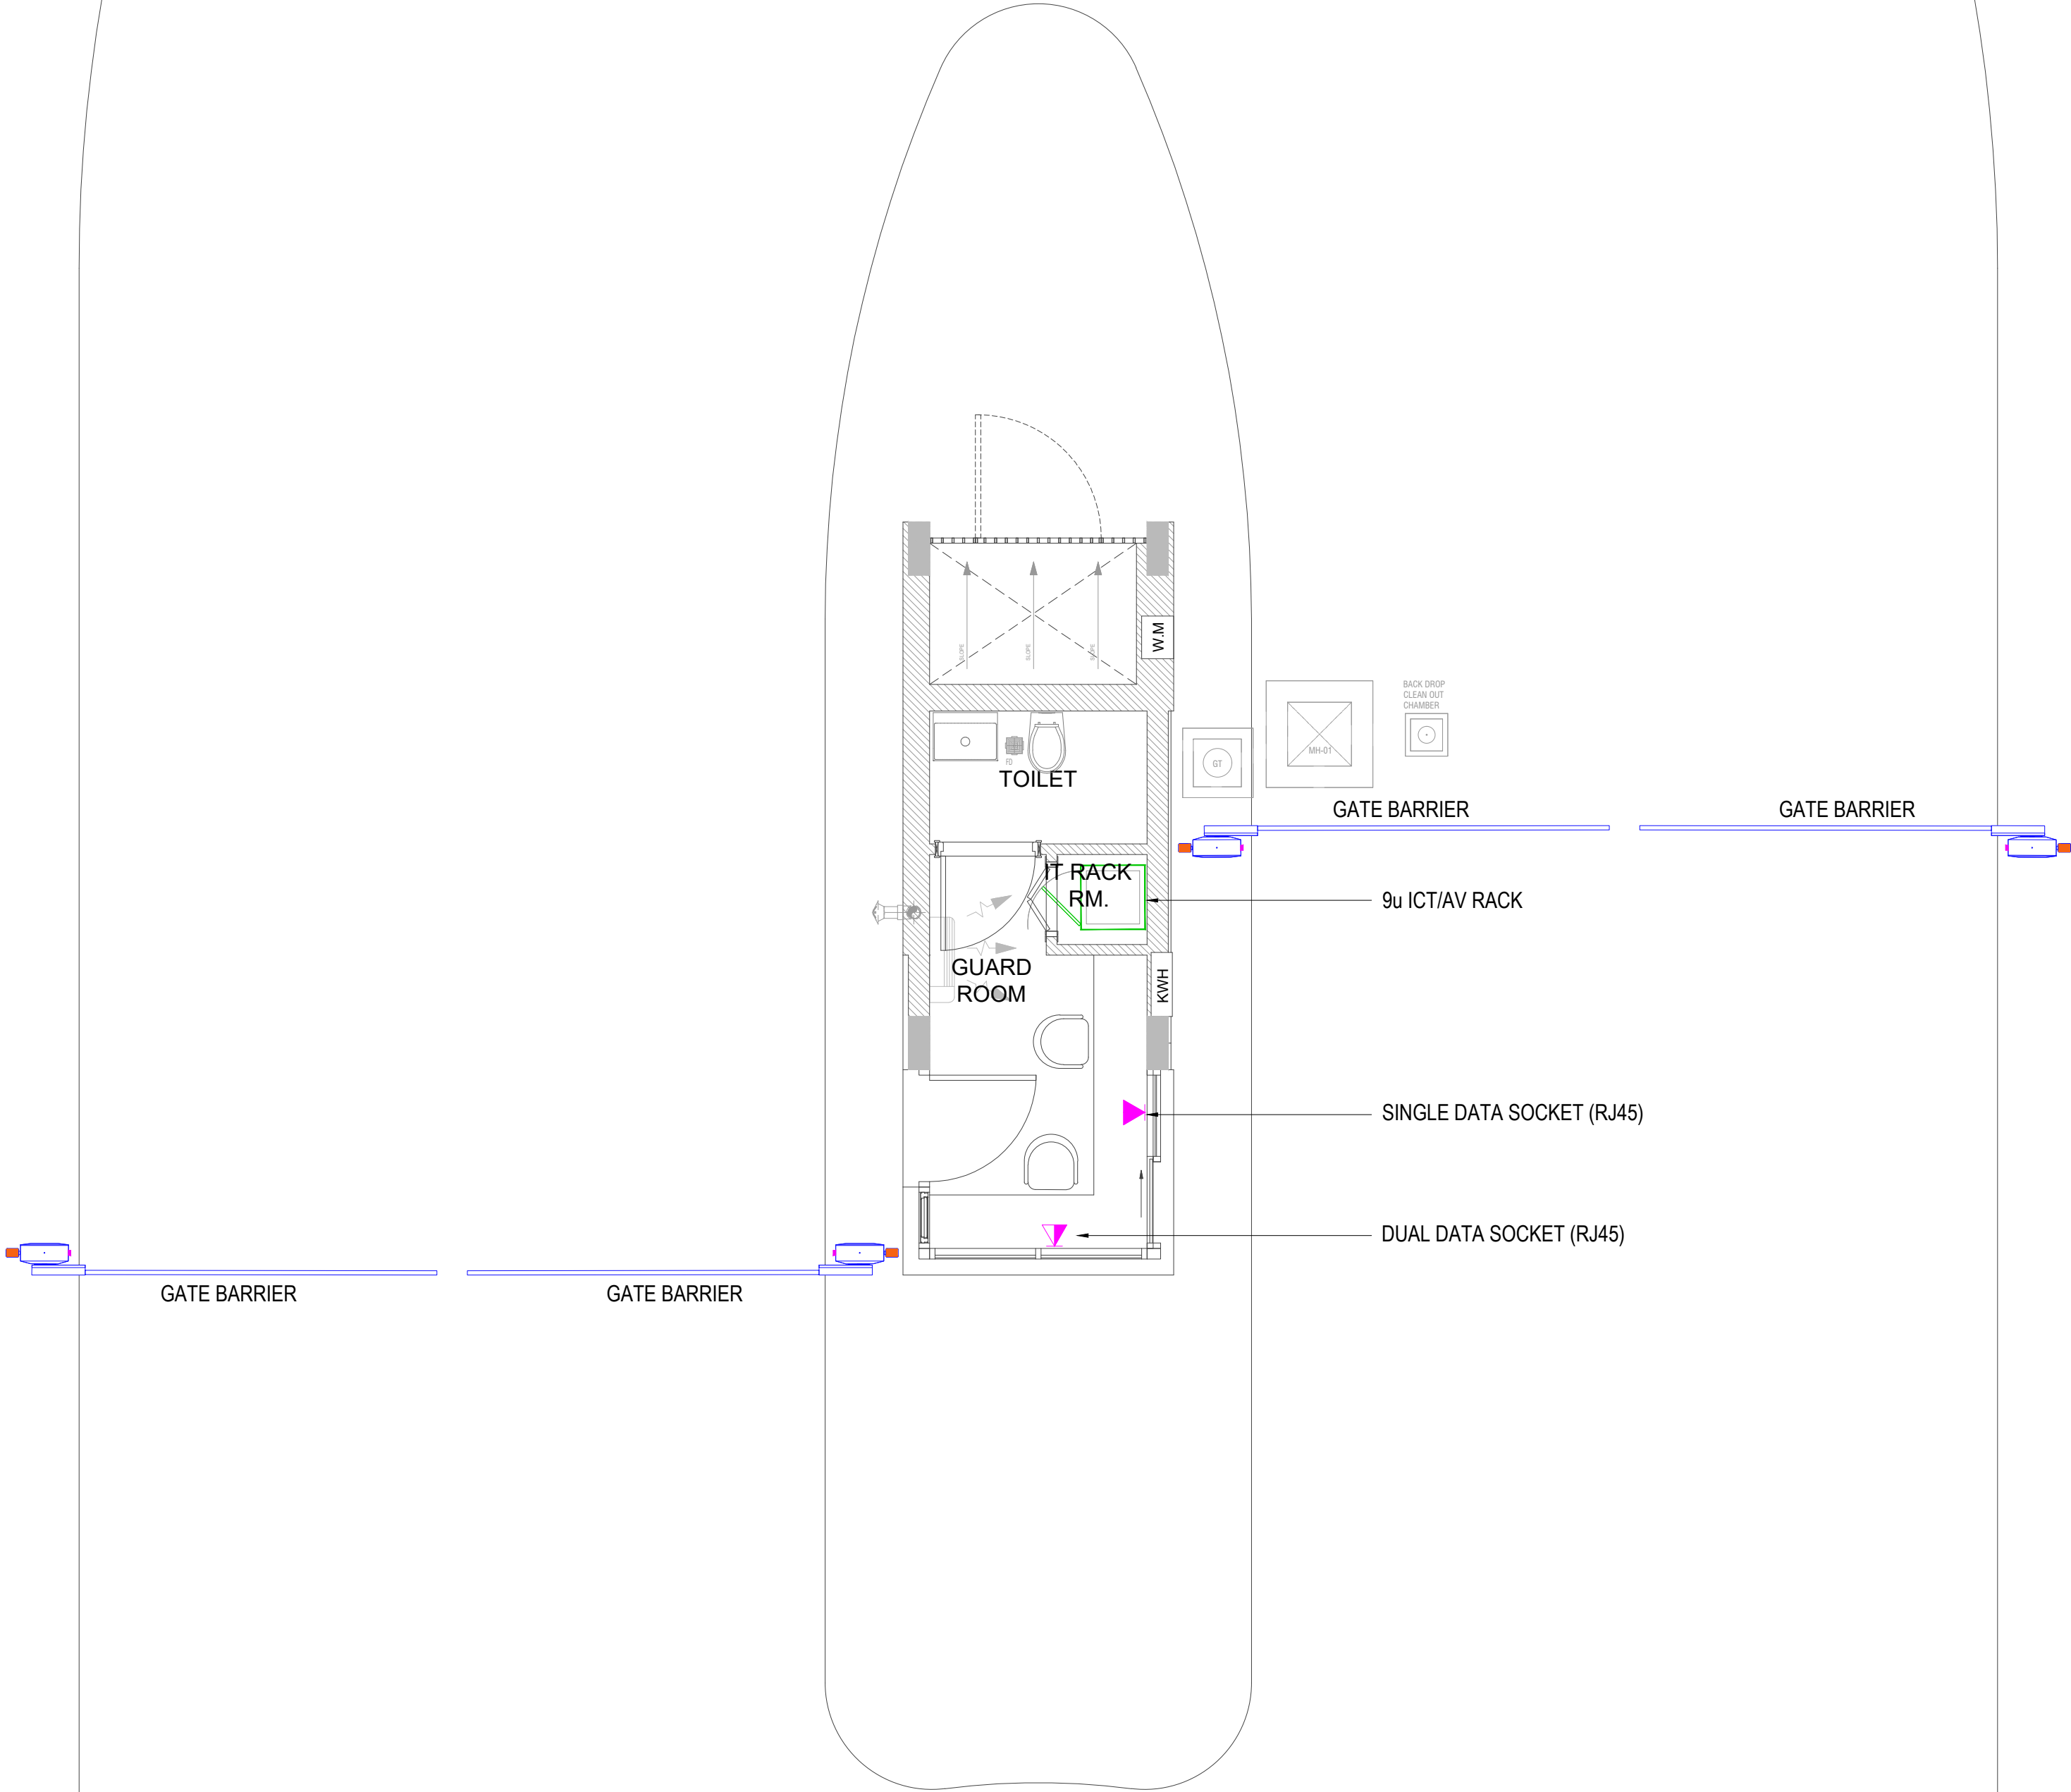

- NOTE: ICT DATA POINTS**
- ALL ICT DATA POINTS LOCATIONS SHALL BE VERIFIED ON-SITE AND PRIOR TO INSTALLATION.
 - ALL ICT DATA POINTS SHALL BE INSTALLED IN ACCORDANCE WITH THE LATEST STANDARDS FOR STRUCTURED CABLING (e.g., ANS/TIA-568, ISO/IEC 11801).
 - DATA OUTLETS SHALL BE RJ45 TYPE, CAT 6A, AND HOUSED IN STANDARD WALL-MOUNT OR FLOOR-BOX FACEPLATES AS PER PROJECT SPECIFICATIONS.
 - CONDUITS AND CABLE TRAYS USED FOR ICT CABLING SHALL BE SEPARATE FROM ELECTRICAL POWER CONDUITS TO AVOID INTERFERENCE.
 - DATA OUTLETS FINAL LOCATIONS SHALL BE COORDINATED WITH ARCHITECTURAL LAYOUTS TO ENSURE ACCESSIBILITY AND AVOID CONFLICTS WITH OTHER FIXTURES OR FINISHES.
 - LABEL ALL DATA OUTLETS CLEARLY AND CONSISTENTLY AS PER THE APPROVED ICT NUMBERING SYSTEM.
 - ENSURE ALL CABLING IS TESTED AND CERTIFIED AFTER INSTALLATION. TEST REPORTS MUST BE SUBMITTED FOR APPROVAL BEFORE COMMISSIONING.

ICT SYSTEM SCHEDULE				
SYMBOL	DESCRIPTION	AV QTY.	NO. OF FLOOR	TOTAL NO. OF AV
	SINGLE DATA SOCKET (RJ45)	1	1	1
	DUAL DATA SOCKET (RJ45)	1	1	1

LEGEND		
SYMBOL	DESCRIPTION	TOTAL NO.
	9U ICT / AV RACK (WALL MOUNTED)	1

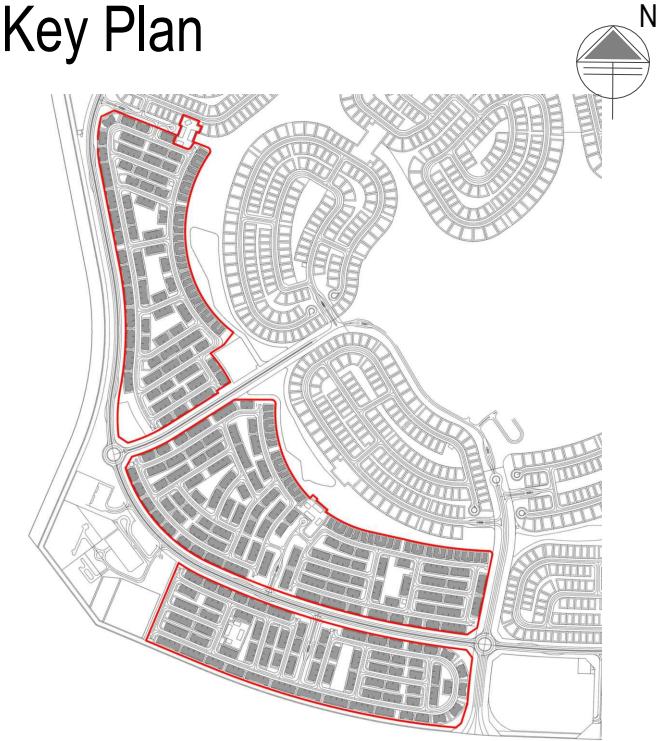

- General Notes :**
- Do not Scale The Drawings. Follow (The MM) Written Dimensions Unless Otherwise Mentioned.
 - Each Drawing Shall be Read in Conjunction With all Other Drawings, Specification & the General Standard Details. In Case of Any Discrepancies Bring it to the Knowledge of Engineer and Same to be Resolved Prior to Execution of Work.
 - Dimensions Shown on These Drawings are Structural Dimensions, Unless Noted Otherwise.
 - All Levels Indicated On These Drawings are Levels as per the Survey Datum, Same Should be Verified at Site Prior to Execution of Work.
 - All Levels Indicated On These Drawings are Based On Design Level, Which is Equivalent to Datum Level and Same Should be Verified at Site Prior to Execution of Work.



00	10/03/2026	JP	TENDER SUBMISSION
No.	Date	Initials	Description

REVISIONS / ISSUE

THIS DRAWING MUST NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR APPROVAL OF ARIF & BINTOAK

Status: **TENDER SUBMISSION**

Client:



Lead Consultant

عارف وبن طوق
Arif&Bintoak
consulting architects & engineers

POST BOX 3670 DUBAI, UAE TEL: 04-3772868 FAX: 04-3770352
POST BOX 42961 ABU DHABI, UAE TEL: 02-454669 ariftoak@emirates.net.ae

Security Consultant

ies **INTERNATIONAL ELECTRONIC SECURITY**
TEL: 04 397 0757, FAX: 04 397 0754
P.O. BOX 12734 DUBAI - U.A.E
ENQUIRIES@IESCONSULTING.AE
AUDIT@IESCONSULTING.AE
WWW.IESCONSULTING.AE

Project Title:

Proposed Residential Townhouses and Standalone Villas TH-1, TH-2, and TH-3 at Grand Polo Club & Resort, Dubai, UAE

Discipline : ICT		
Drawing title: GUARD HOUSE (TH-02) ICT SYSTEM LAYOUT GUARD HOUSE - TH-02		
Architectural Engineer	Electrical Engineer	Structural Engineer
MUSTAFA ABID	MARWAN MOHD.	RIHAM RAMADAN
Registration # 5847	Registration # 80102	Registration # 105082
Scale(s): 1 : 50	Date drawn: 10/03/2026	Project no: 1857
Drawn by: JP	Checked: MM	Approved: JR
Drawing Number : GPCR-TH02-IES-PL-GH2-ICT-IT-0001-00		