



1 RETURN AIR CEILING DIFFUSER, WALL GRILLE (TYPICAL)




2 FCU HANGING DETAIL

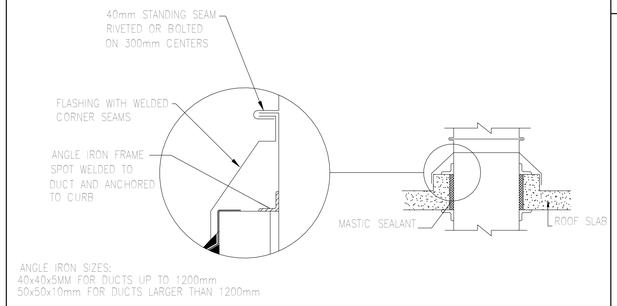


3 DUCT THRU SLAB

GENERAL NOTES


1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CO-ORDINATION OF ALL SERVICES.
2. ALL DUCT, GRILLE AND PIPE SIZES ARE IN MM UNLESS MENTIONED
3. ALL CONDENSATE DRAINS FROM EACH FCU WHETHER SHOWN ON DRAWING OR NOT SHALL RUN WITH A FALL TO THE NEAREST FLOOR DRAIN OR WASTE RISER VIA U-TRAPS.
4. ALL DUCT CONNECTIONS TO A/C UNITS SHALL BE OF THE FLEXIBLE TYPE DUCT CONNECTION.
5. ACCESS PANELS TO BE PROVIDED WITHIN FALSE CEILING AT ALL LOCATIONS OF FCU, VALVES, DAMPERS. CONTRACTOR SHALL CO-ORDINATE WITH ALL MEP SERVICES & FALSE CEILING LAYOUT TO ENSURE THAT COMMON ACCESS PANELS TO BE PROVIDED FOR MAINTENANCE.
6. SUITABLE APPROVED SLEEVES SHALL BE PROVIDED WHERE BOTH INSULATED AND NON INSULATED DUCTS PASS THROUGH WALLS/FLOORS ETC. ALL GAPS TO BE SEALED WITH SPECIFIED AND APPROVED TYPE MATERIAL.
7. ALL DUCTWORK WITHIN 3.0 M OF FAN COIL UNITS SHALL BE ACOUSTICALLY LINED.
8. VCDs SHALL BE PROVIDED AT ALL A/C DUCT BRANCHES. WHETHER SHOWN ON DRAWINGS OR NOT FOR PROPER AIR BALANCING.
9. POWER FACTOR CAPACITORS SHALL BE PROVIDED AS PER ELECTRICAL SPECIFICATION (A/C UNITS, ...etc)
10. ALL SUPPLY AIR OUTLETS SHALL HAVE BUILT-IN V.C.D FOR FINAL FINE TUNING.
11. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER AND RESOLVED PRIOR TO FINALIZATION OF CONTRACT. ANY VARIATION DUE TO NOT DOING SO, WILL NOT BE ENTERTAINED AND THE CONSEQUENCES WILL BE RECTIFIED BY THE CONTRACTOR AT HIS ACCOUNT.
12. FINAL LOCATION OF FRESH AIR LOUVER & EXTRACT AIR LOUVER TO BE CO-ORDINATED WITH ARCHITECT. COLOR SUBJECT TO ENGINEERS APPROVAL.
13. WHERE MORE THAN ONE SERVICE (ELECTRICAL CABLES,DUCT) IS ROUTED THROUGH THE SAME AREA, THEY SHALL BE SUPPORTED BY STRUCTURAL FRAME SUPPORT WITH SERVICES STACKED ONE ABOVE THE OTHER.
14. CONTRACTOR TO ENSURE THAT THE SPECIFIED ROOM NOISE LEVELS (NC) ARE ACHIEVED.
15. CONTRACTOR SHALL FORWARD ACTUAL PHYSICAL DIMENSIONS, WEIGHTS OF EQUIPMENT FOR STRUCTURAL ENGINEER'S APPROVAL.
16. CONTRACTOR TO CO-ORDINATE WITH STRUCTURAL DRAWINGS FOR OPENINGS AND PENETRATIONS. SUBMIT BUILDING WORK SHOP DRAWING FOR STRUCTURAL ENGINEER APPROVAL. ANY OPENING REQUIRED OTHER THAN THAT SHOWN ON STRUCTURAL DRAWING SHALL BE APPROVED BY STRUCTURAL ENGINEER.
17. ALL SLAB SUSPENDED SUPPORT LOCATION SHALL BE SUBMITTED FOR APPROVAL. NO DRILLING OR FIXING OF SUPPORT FROM OR ON SLAB SHALL BE CARRIED OUT WITHOUT THE STRUCTURAL ENGINEER'S APPROVAL.
18. FINAL LOCATION OF ALL AIR OUTLET SHALL BE CO-ORDINATED WITH FINAL FALSE CEILING LAYOUT APPROVED BY ARCHITECT & ID.
19. THERMOSTATS LOCATION SHALL BE COORDINATED WITH ARCHITECT/ID.
20. THE CONTRACTOR SHALL SUBMIT THE ESP CALCULATION, VERIFY THE SAME AS PER ACTUAL CONDITIONS AND SUBMIT FOR ENGINEER'S APPROVAL.

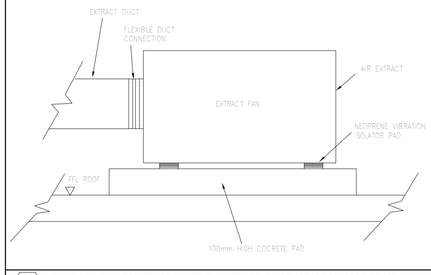


4 EXTRACT FAN PLINTH MOUNTED EXTRACT FAN INSTALLATION DETAIL




5 VERTICAL DUCTS SUPPORT DETAIL

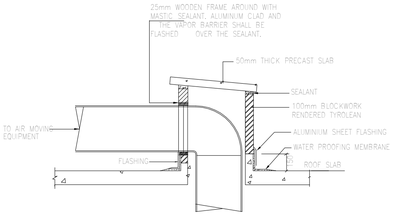


6 DETAIL FOR DUCTS PASSING THRU ROOF SLAB

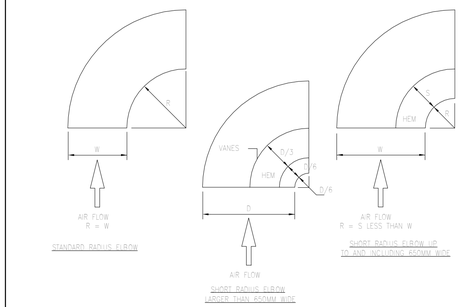


7 ROUND ELBOW

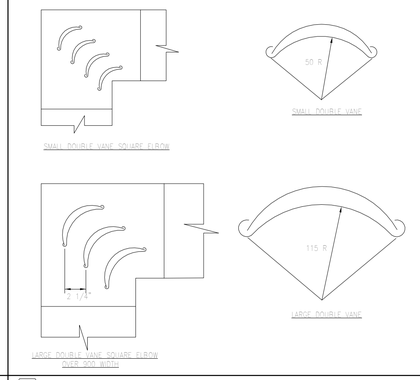


8 SQUARE ELBOW

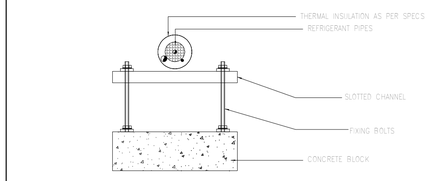


09 REFRIGERANT PIPES SUPPORT INSTALLATION DETAILS

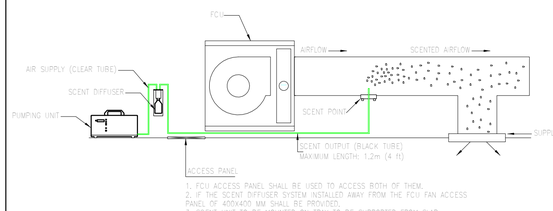


10 FCU SCENT DIFFUSER

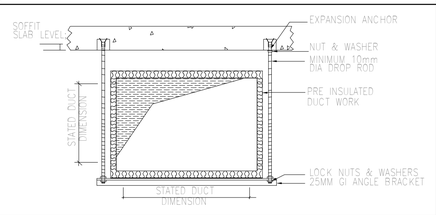


11 DUCTWORK SUPPORT DETAIL

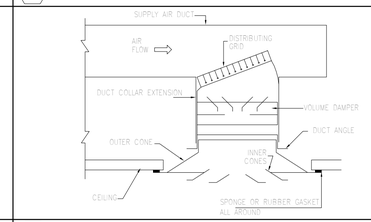

12 CEILING DIFFUSER

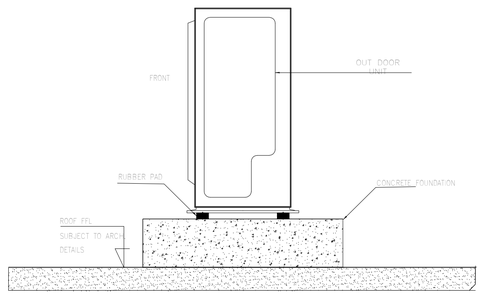


13 OUTDOOR UNIT FOUNDATION SUPPORT INSTALLATION DETAILS

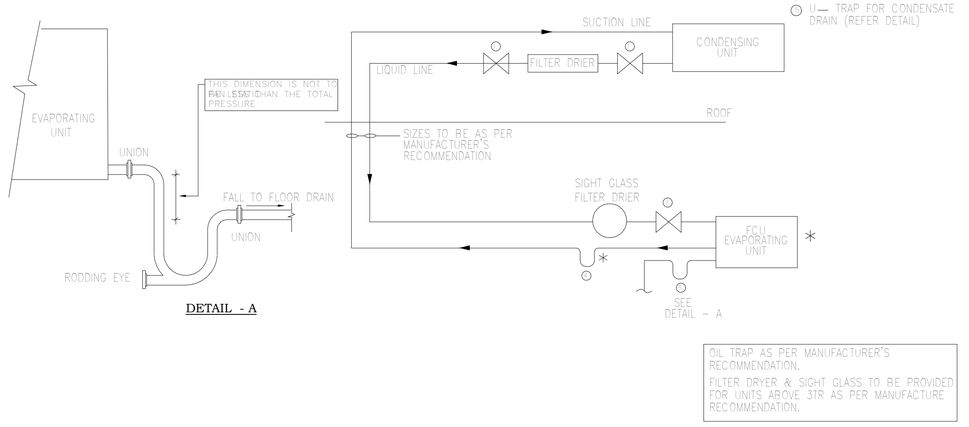

14 DX SPLIT UNIT CONNECTION SCHEMATIC DETAIL

Key Plan



General Notes :

01. Do not Scale The Drawings. Follow (The MM) Written Dimensions Unless Otherwise Mentioned.
02. Each Drawing Shall be Read in Conjunction With all Other Drawings,Specification & the General Standard Details. In Case of Any Discrepancies Bring it to the Knowledge of Engineer and Same to be Resolved Prior to Execution of Work.
03. Dimensions Shown on These Drawings are Structural Dimensions. Unless Noted Otherwise.
04. All Levels Indicated On These Drawings are Levels as per the the Survey Datum, Same Should be Verified at Site Prior to Execution of Work.
05. All Levels Indicated On These Drawings are Based On Design Level, Which is Equivalent to Datum Level and Same Should be Verified at Site Prior to Execution of Work.

TENDER DRAWINGS

No.	Date	Initials	Description
00	10/03/2026	LSG	TENDER SUBMISSION
00	16/01/2026	LSG	DETAILED DESIGN SUBMISSION
00	31/10/2025	LSG	SCHEMATIC DESIGN SUBMISSION
00	15/10/2025	LSG	SCHEMATIC SUBMISSION-50%
00	01/09/2025	LSG	CONCEPT DESIGN SUBMISSION

REVISIONS / ISSUE

THIS DRAWING MUST NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR APPROVAL OF ARIF & BINTOAK

Status: TENDER SUBMISSSION

Client: EMAAR

Lead Consultant

الاستشاري:
عارف وبن طوق
Arif&Bintoak
consulting architects & engineers
POST BOX 3670 DUBAI,UAE TEL 04-3372858 FAX 04-3370352
POST BOX 42981 ABU DHABI,UAE TEL 02-634669 -arifbak@emirates.net.ae

Project Title:
Proposed Residential Townhouses and Standalone Villas
TH-01, TH-02, and TH-03 at Grand Polo Club & Resort,
Dubai, UAE

Discipline : MECHANICAL

Drawing title:
HVAC STANDARD DETAILS

Architectural Engineer	Electrical Engineer	Structural Engineer
MUSTAFA ABID	MARWAN MOHD.	RIHAM RAMADAN
Registration # 5847	Registration # 80102	Registration # 105092
Scale(s): NTS	Date : 10/03/2026	Project no: 1857
Drawn by: LSG	Checked : MAV	Approved : MRM

Drawing Number : GPCR-TH02-AB-DRG-SL-MEC-HV-1001-00

© AB I A1 Title Block . BIM Standard Ver. 2.0

This 2D drawing is extracted from 3D BIM Model

3/9/2026 8:24:59 AM