


DX Units (CCs)															
Unit Ref. (HAP)	Fcu Ref.No.	Space	Unit Type	QTY	Area	NRT	TCL	SCL	Flow	Density	Density	FA	On Coil DB/WB	Off Coil DB/WB	Estimated Electrical Load EACH
					m²	RT	kW	kW	L/s	W/m²	m³/TR	L/s	°C	°C	kW
01-CH	FCU-CH-01 FCU-CH-02 FCU-CH-03	CLUBHOUSE	DUCTED	3	123.50	2.53	8.90	7.10	457	216.19	16.27	37	25.4 / 17.9	12.5 / 11.8	4.09
02-GYM	FCU-GY-01 FCU-GY-02 FCU-GY-03 FCU-GY-04	GYM	DUCTED	4	165.30	2.76	9.70	7.00	414	234.72	14.98	54	26.4 / 19.0	12.5 / 11.9	4.09
02-YOGA	FCU-YO-01 FCU-YO-02	YOGA	DUCTED	2	76.00	2.70	9.50	7.30	454	250.00	14.07	52.5	26.3 / 18.5	12.9 / 12.2	4.09
03-M.WC	FCU-SB-01	MALE & HC WASHROOM	DUCTED	1	37.50	1.73	6.10	4.30	282	162.67	21.62	120	25.7 / 18.8	12.9 / 12.3	2.37
03-W.WC	FCU-SB-02	WOMEN WASHROOM & JANITOR	DUCTED	1	28.70	1.65	5.80	4.30	280	202.09	17.40	92	25.8 / 18.6	13.1 / 12.5	2.37
03-RESTING	FCU-SB-03	RESTING ROOM	DECORATIVE	1	16.80	0.77	2.70	2.10	155	160.71	21.88	28	24.9 / 18.0	13.4 / 12.8	1.82
03-IT	FCU-SB-04	IT ROOM	DECORATIVE	1	5.70	0.68	2.40	2.30	173	421.05	8.35	0	23.5 / 16.2	12.6 / 11.9	1.79
03-STORE	FCU-SB-05	STORE	DECORATIVE	1	12.80	0.60	2.10	2.00	161	164.06	21.44	0	23.9 / 16.9	13.4 / 12.7	1.31
03-PUMP ROOM	FCU-SB-06	UNDERGROUND PUMP ROOM	DUCTED	1	119.30	2.30	8.10	5.80	350	67.90	51.80	72	26.3 / 18.8	12.5 / 11.8	3.63
1. ALL AIR CONDITIONING UNITS SHALL HAVE ACTUAL CAPACITY AS GIVEN ABOVE AT AMBIENT TEMPERATURE: 46DB °C															
2. ALL DX A/C EQUIPMENT SHALL BE WITH REFRIGERANT R407C OR R410A.															
3 - EXTERNAL STATIC PRESSURE FOR ALL FANS SHALL BE CALCULATED BY THE CONTRACTOR AND SUBMITTED FOR ENGINEER'S APPROVAL															
4 - CONTRACTOR TO CHECK SIZE OF REFRIGERANT PIPES AGAINST THE TOTAL PIPE LENGTH/ELEVATION DIFFERENCE AND MANUFACTURER RECOMMENDATION.															
5 - AIR COOLED CONDENSING UNITS TO BE SUITABLE FOR OUTDOOR INSTALLATION.															
6 - HVAC UNITS SHALL BE SELECTED ACCORDING TO DM GREEN BUILDING REGULATIONS AND DBC.															
7 - ELECTRICAL POWER SUPPLY: 400 /220V ,3PH/1PH & 50Hz.															
8 - AC CONDENSATE DRAIN SHALL BE INSULATED.															
9 - ACOUSTIC LINED SHALL BE PROVIDED WHERE IS REQUIRED TO ACHIEVE THE NC LEVEL IN EACH SPACE.															
10 - THE SELECTED UNITS LISTED IN THE ABOVE SCHEDULE PROVIDED TO ESTIMATE THE ACTUAL POWER CONSUMPTION ONLY, THE CONTRACTOR SHALL RESPONSIBLE TO PROVIDE ACTUAL SELECTION BASED ON THE CALCULATED VALUE															
11 - HVAC DESIGN LAYOUT BASED ON THE CALCULATED UNIT AIR FLOW RATE, CONTRACTOR SHALL BE RESPONSIBLE TO REVISE DUCT SIZE, AIR DISTRIBUTION AND AIR OUTLET DIFFUSER ACCORDING TO ACTUAL AC UNIT SELECTION WITHOUT COST IMPACT.															
12 - COIL ENTERING/LEAVING TEMPERATURE SHOWN IN THE SCHEDULE BASED ON THE COOLING LOAD CALCULATION/HAP SOFTWARE, THE CONTRACTOR SHALL RESPONSIBLE TO PROVIDE UNIT SELECTION TO ACHIEVE THE REQUIRED INDOOR TEMPERATURE (23°).															
13 - UNTREATED/DIRECT FRESH AIR HAVE BEEN PROVIDED TO SAME OF AC INDOOR UNITS IN ORDER TO PROVIDE THE MINIMUM FRESH AIR IN THE BUILDING.CONTRACTOR SHALL TAKE THE SAME INTO CONSIDERATION DURING THE UNIT SELECTION.															

SCHEDULE OF FANS CCs								
REF NO.	LOCATION	SERVICE	TYPE	QTY	FAN		ELECTRICAL	
					CAPACITY	ESP	ESTIMATED POWER	DETAILS
					L/s	Pa	Watts	V / PH / HZ
EAF-CH-01	Roof	CLUBHOUSE	Centrifugal Box Type	1	112	100	370	220 / 1 / 50
EAF-GY-01	Roof	GYM	Centrifugal Box Type	1	215	100	370	220 / 1 / 50
EAF-YO-01	Roof	YOGA	Centrifugal Box Type	1	105	100	370	220 / 1 / 50
EAF-SB-01	Roof	GARBAGE ROOM	Centrifugal Box Type	1	50	100	370	220 / 1 / 50
EAF-SB-02	Roof	PUMP ROOM	Centrifugal Box Type	1	72	150	370	220 / 1 / 50
Notes: FANS SHALL BE CENTRIFUGAL BOX TYPE WITH TIMER AND SPEED CONTROLLER ESTIMATED ESP IS APPROXIMATE CONTRACTORS TO CALCULATE EXACT ESP FOR EACH TYPE OF								

ERV											
SL NO	REF NO.	LOCATION	AIR FLOW		ABSORPTION HEAT RECOVERY PLATE				FAN ESTIMATED POWER (KW)		QTY
			SUPPLY FAN	EXTRACT FAN	EXTRACT SIDE		SUPPLY SIDE		SUPPLY FAN (kW)	EXTRACT FAN (kW)	
			L/s	L/s	AIR ON DBT/WBT °C	AIR OFF DBT/WBT °C	AIR ON DBT/WBT °C	AIR OFF DBT/WBT °C			
1	ERV-SB-01	SERVICE BLOCK ROOF	240	290	25.0/18.7	32.0/20.9	34.0/32.0	30.7/30.7	1.10	1.10	1
NOTES: 1- Contractor shall verify and finalize the fan external static pressure based on the final selection of the units and final duct routing at no extra cost. 2- Contractor shall verify and finalize the electric power requirements based on the final selection of the units at no extra cost. 3- The contractor shall select machines that are able to operate up to 52 °C, moreover, during selection outdoor machine muste be considered for operating temperature up to 52 °C. 4- The unit shall be double skin.											

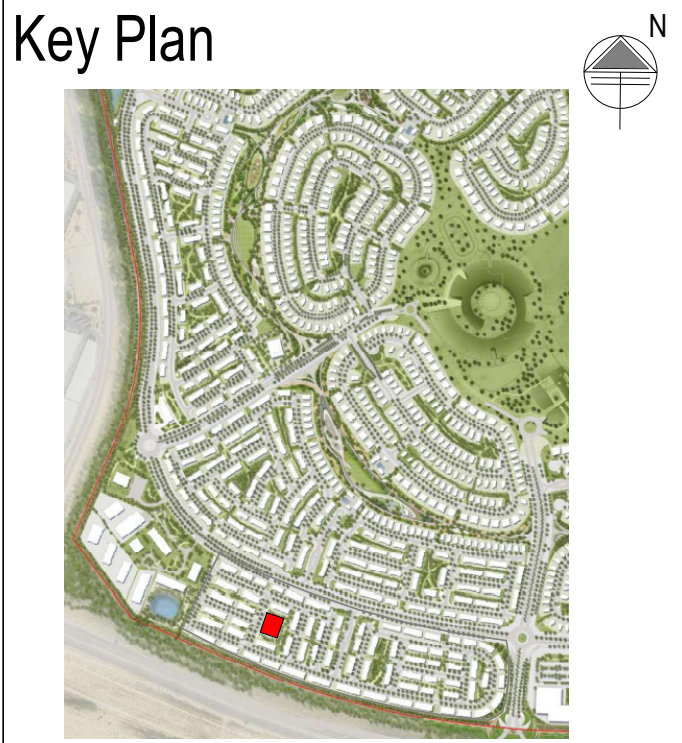

- General Notes :**
- 01. Do not Scale The Drawings. Follow (The MM) Written Dimensions Unless Otherwise Mentioned.
 - 02. Each Drawing Shall be Read in Conjunction With all Other Drawings,Specification & the General Standard Details. In Case of Any Discrepancies Bring it to the Knowledge of Engineer and Same to be Resolved Prior to Execution of Work.
 - 03. Dimensions Shown on These Drawings are Structural Dimensions. Unless Noted Otherwise.
 - 04. All Levels Indicated On These Drawings are Levels as per the the Survey Datum, Same Should be Verified at Site Prior to Execution of Work.
 - 05. All Levels Indicated On These Drawings are Based On Design Level, Which is Equivalent to Datum Level and Same Should be Verified at Site Prior to Execution of Work.



00	10/03/2026	LSG	TENDER SUBMISSION
00	16/01/2026	LSG	DETAILED DESIGN SUBMISSION
00	31/10/2025	LSG	SCHEMATIC DESIGN SUBMISSION
00	15/10/2025	LSG	SCHEMATIC SUBMISSION-50%
00	01/09/2025	LSG	CONCEPT DESIGN SUBMISSION
No.	Date	Initials	Description
REVISIONS / ISSUE			
THIS DRAWING MUST NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR APPROVAL OF ARIF & BINTOAK			
Status			
TENDER SUBMISSSION			
Client			
EMAAR			
Lead Consultant			
المستشارون: عارف وبن طوق Arif & Bint oak consulting architects & engineers POST BOX 3678 DUBAI, UAE TEL: 84-3372886 FAX: 84-3378352 POST BOX 42081 ABU DHABI, UAE TEL: 33-4246065 arif@arifbintoak.com.ae			
Project Title: Proposed Residential Townhouses and Standalone Villas TH-01, TH-02, and TH-03 at Grand Polo Club & Resort, Dubai, UAE			
Discipline : MECHANICAL			
Drawing title: COMMUNITY CENTER EQUIPMENT SCHEDULE			
Architectural Engineer		Electrical Engineer	
MUSTAFA ABID		MARWAN MOHD.	
Registration # 5847		Registration # 60102	
Scale(s):		Project no:	
Date: 10/03/2026		1857	
Drawn by: LSG		Checked: MAV	
Approved:		MRM	
Drawing Number:		GPCR-TH02-AB-SL-ZZZ-MEC-HV-1403-00	